


CHEMICAL & INDUSTRIAL APPLICATIONS

Pumps, Compressors & Expertise

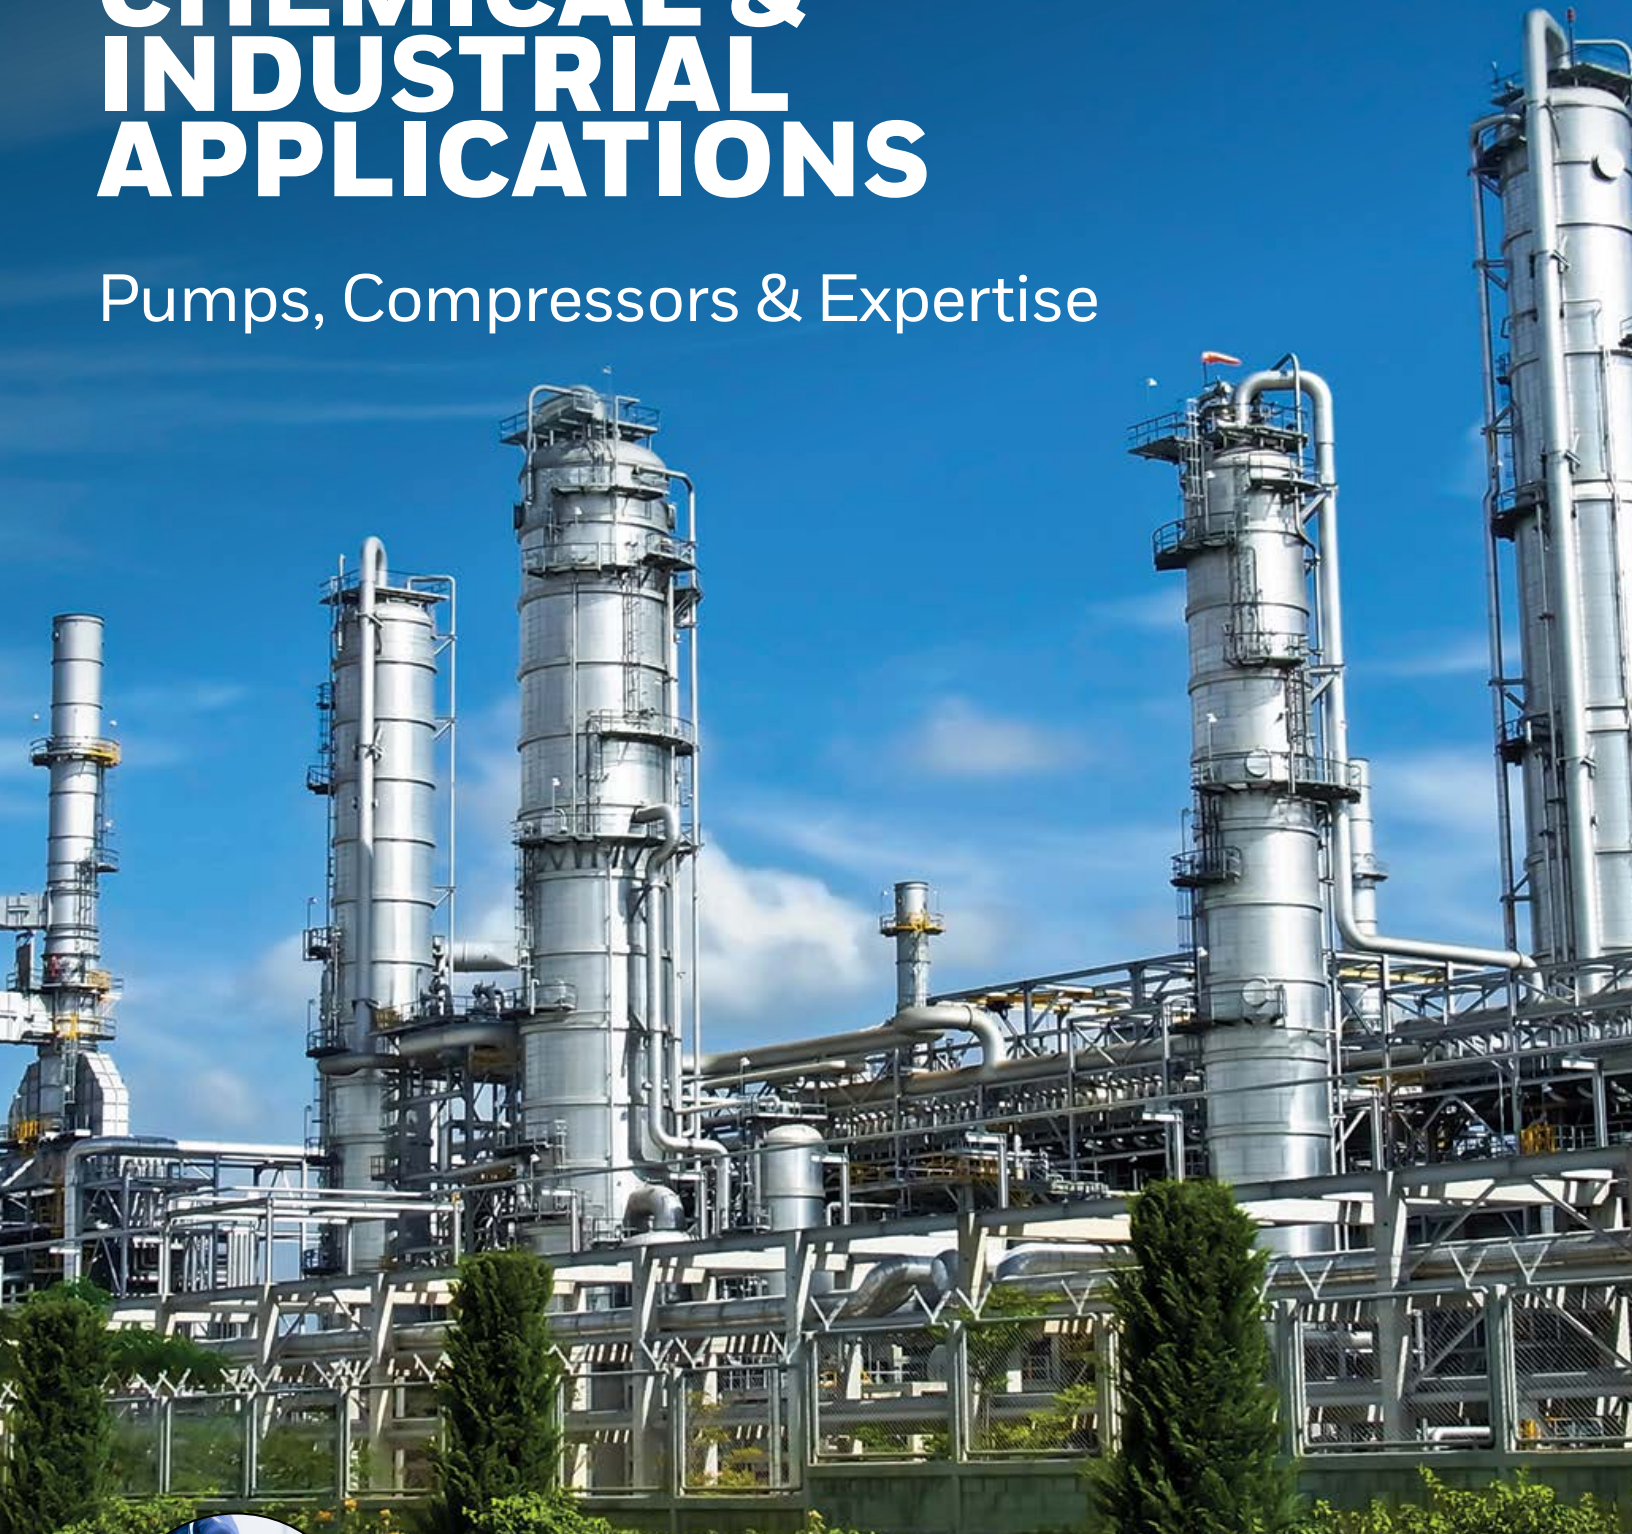

Chemical Processing

Honeywell
Sundyne

 **Sundyne**
Pumps

 **Sundyne**
Compressors

ANSIMAG
Sealless Pumps

 **HMD KONTRO**
Sealless Pumps

 **Marelli Bombas**


PPi
Diaphragm Compressors

SUNFLO

Sundyne's Legacy, Innovation and Total Lifecycle Value to the Chemical and Industrial Industries

The broad Sundyne product portfolio of pumps & compressors addresses a wide range of CPI applications. The unique Sundyne combination of technology, expertise and support provides a 360 degree, full lifecycle service that spans everything from project pre-feed to comprehensive 24x7 support utilizing a global network of Authorized Service Centers and aftermarket specialists.

- Originators of Low Flow High Head pumps & compressors
- Invented sealless mag-drive technology
- Pioneered ETFE pump linings

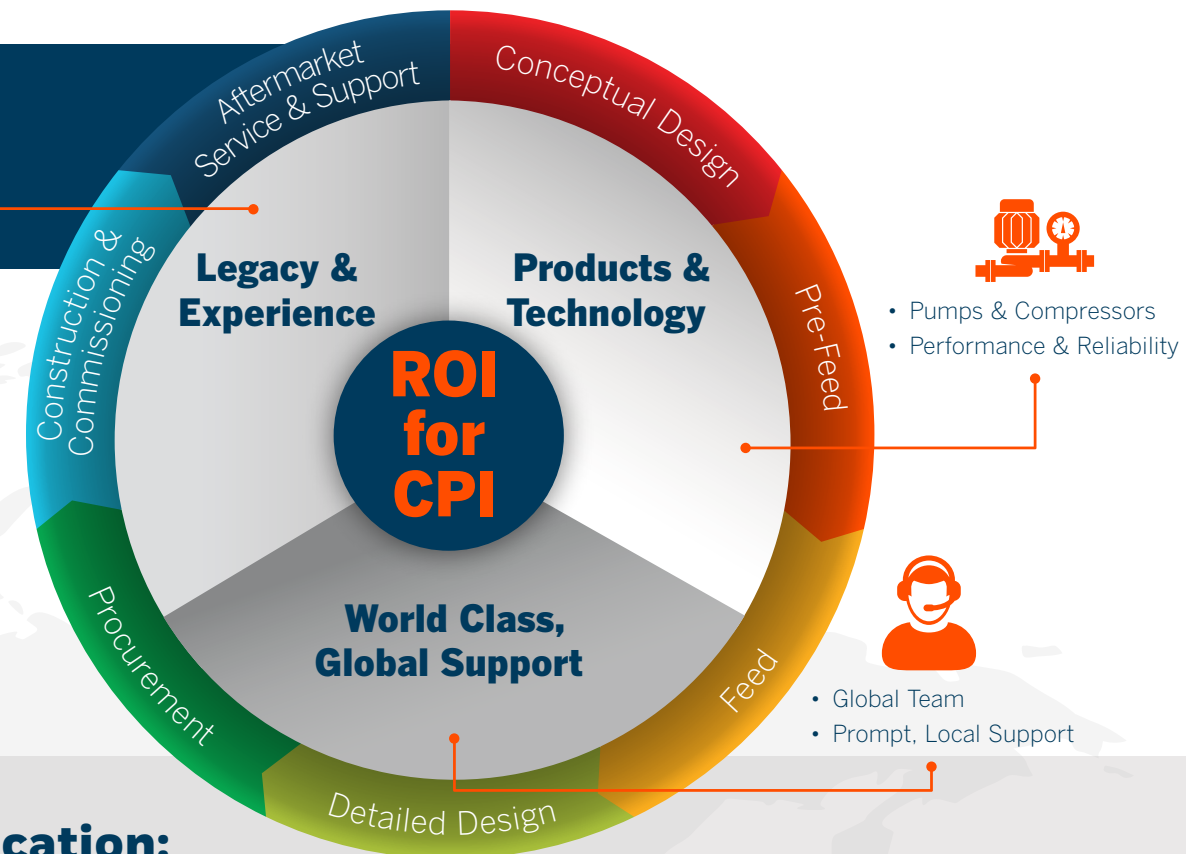

The Right Technology for your CPI Application:



ANSIMAG ETFE-Lined Magnetic Drive Sealless Pumps




HMD Kontro Metallic Sealless Magnetic Drive Pumps



Sundyne High Head Low Flow Process Pumps



Marelli Heavy Duty API 610 Centrifugal Pumps



HMP Horizontal Multi-Stage Pumps



LMC Line Mounted Centrifugal Compressors




LF Multi-Stage Centrifugal Compressors



PPI Diaphragm Compressors

A Legacy of Expertise and Innovation:

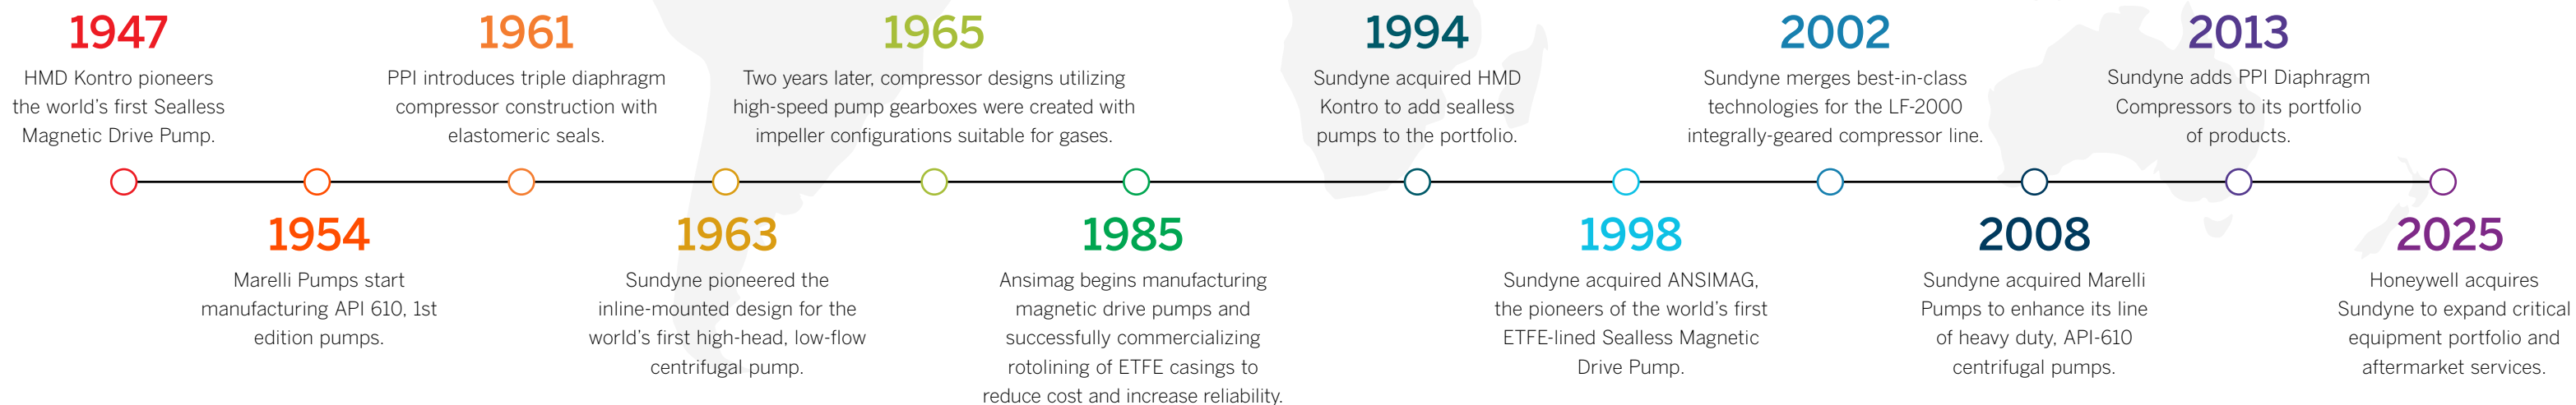


Chemical Applications for Sundyne Pumps and Compressors



Petrochemical

Petrochemicals are organic chemicals derived from oil and gas via hydrocarbon cracking and chemical processing. Petrochemical plants are typically located within refineries, to take advantage of produced feedstocks. These feedstocks, such as ethylene, propylene, methanol, hydrogen and aromatic hydrocarbons, are used to generate thousands of polymeric chemicals for industrial and consumer use. **Sundyne pumps & compressors** are widely used for petrochemical processing because they meet exacting API, ISO and ASME standards for safety, reliability and efficiency.

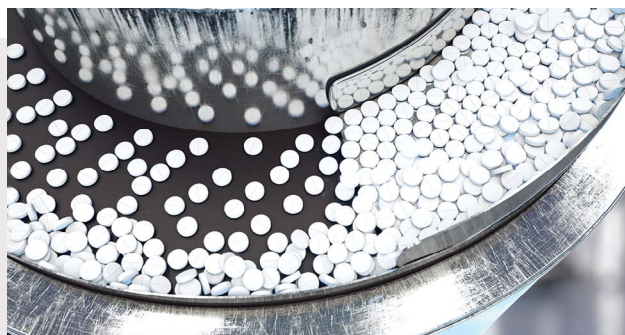

Pharma & Biotech

Pharmaceutical companies utilize sterile processes and equipment on an industrial-scale to synthesize drugs for world-wide distribution. Process engineers in the manufacturing process utilize **Sundyne sealless magnetic drive pumps** to keep the drugs sterile and pure.



Fine/Inorganic Specialty Chemicals

Water, salts, acids & bases form the bulk of the inorganic chemical market. These chemicals are commonly produced and are used in virtually every industry. (e.g. Sulfuric Acid is the most commonly produced chemical in the world.) Specialty chemicals such as acids require safe handling by **Sundyne sealless magnetic drive pumps**.



Isocyanates

Isocyanates are the raw materials that make up polyurethane products. They're used heavily in the automobile industry to make paints, surface coatings, foams, car seats and rubber. Isocyanates are widely used in the construction industry for varnishes and building insulation materials. They are also commonly used to make a wide variety of packaging materials.

Isocyanates include compounds that are classified as potential human carcinogens. Effects of hazardous exposures include asthma, lung problems and general irritation to eyes, nose, throat and skin. As a result, **Sundyne sealless magnetic drive pumps** are commonly used for the safe handling of these volatile chemicals.



Chlor-Alkali

Almost half of the world's chemicals depend on chlor-alkali products, which come from salt. When electrical current is introduced into aqueous salt brine solutions, chlorine (sodium chloride) and caustic soda (sodium hydroxide) are produced. Chlorine is used to make bleach, plastics, vinyl, pharmaceuticals and more than 15,000 commercially traded compounds. Caustic soda (sodium hydroxide) is needed to make paper, textiles, aluminum, detergents and it's also used for industrial & municipal water treatment.

There are a number of stages involved in Chlor-Alkali production, including brine preparation, liquefaction, evaporation, cooling & drying, compression and storage. **Sundyne pumps & compressors** are used at each stage of the process.



Plastics & Polymers

Chemical companies use base chemicals to make: polyethylene for bottles & containers; polypropylene for packaging, clothing and carpeting; polyvinyl chloride for piping & construction materials; and polystyrene to make toys, recreation equipment & appliances. These plastics & polymers represent almost 80% of the CPI industry's output worldwide. Several different **Sundyne pumps & compressors** are used in these processes.



Agricultural Chemicals































Chemical agents including herbicides and insecticides are used to control crop-harming insects and weeds. Nitrogen-based fertilizer can be produced from natural gas, resulting in products such as ammonium nitrate and urea. **Sundyne API 610 heavy duty integrally geared pumps** are specifically engineered for the extremely high-head services needed to process fertilizer.



Polycarbonates

Polycarbonates (PC) are a group of thermoplastic polymers that are easily molded, but virtually unbreakable. PC's durability and low-scratch resistance makes them a preferred material for lenses in eyewear, medical devices, windows & greenhouses. PC is widely used in automotive components, bottles and numerous other products. Each year, almost 3 million tons of polycarbonate are produced globally. PC is manufactured by dissolving numerous chemicals in water and chlorinated organic solvents. It's a toxic process that is corrosive to the pumps & compressors handling the input materials. A wide range of **Sundyne API 610 direct drive and integrally-geared pumps**, as well as **API 617 single- and multi-stage centrifugal compressors** are used in the production process.







Sundyne Products

	SUNDYNE PUMPS												SUNDYNE COMPRESSORS		
	 Marelli Bombas	 ANSIMAG	 HMD KONTRO	 HMD KONTRO	 HMD KONTRO	 HMD KONTRO	 Sundyne Pumps	 Sundyne Pumps	 Marelli Bombas	 Marelli Bombas	 Sundyne Pumps	 SUNFLO	 Sundyne Compressors	 Sundyne Compressors	 PPI
															
	General Duty Process ISO Chemical Pumps	Sealless Mag Drive ETFE ANSI/ISO Pumps	General Transfer Sealless Mag Drive Pumps	Chemical Service ASME/ISO Sealless Mag Drive Pumps	High Pressure ASME/API 685 Sealless Mag Drive Pumps	General Service Petroleum API 685 OH2, OH4 Sealless Mag Drive Pump	API 610 OH3, OH5 Direct Drive Pumps	API 610 OH6 Integrally Geared Pumps	API 610 BB1, BB2, BB3 / ISO Centrifugal Pump	API 610 VS1, VS2, VS4, VS6 / ISO Vertically Suspended Pumps	HMP Horizontal Multi-Stage Pumps	Industrial Grade Centrifugal Pumps	Fit-for-Purpose Line Mounted Centrifugal Compressors	API 617 Centrifugal Multi-Stage Compressors	Diaphragm Compressors with API 618 Option
Chemicals	Sundyne Pumps												Sundyne Compressors		
Chlor Alkali		✓	✓	✓	✓	✓		✓					✓	✓	✓
Inorganic Chemicals	✓	✓	✓	✓	✓	✓	✓		✓		✓				
Specialty & Fine Chemicals	✓	✓	✓	✓	✓	✓	✓		✓		✓				✓
Isocyanates		✓	✓	✓	✓	✓									
Polycarbonates			✓	✓	✓	✓			✓		✓		✓		
High Value Liquids/Gases		✓	✓	✓	✓	✓									✓
Methanol	✓	✓	✓	✓	✓	✓		✓							
Carbamate								✓			✓				
Ammonia	✓		✓	✓	✓	✓		✓	✓	✓	✓		✓	✓	✓
MEG								✓			✓				
Urea	✓		✓	✓	✓	✓		✓	✓	✓	✓				
Sulfuric Acid	✓	✓	✓	✓	✓	✓		✓							
Difficult to Seal Liquids/Gases		✓	✓	✓	✓	✓		✓							✓
Solvents		✓	✓	✓	✓	✓		✓							
Vaccine Production		✓	✓	✓	✓	✓		✓							
Petrochemicals	Sundyne Pumps												Sundyne Compressors		
Olefins (Propylene, Ethylene)	✓		✓	✓	✓	✓		✓	✓	✓	✓		✓	✓	✓
Aromatics (Benzene, Toluene, Xylene)	✓		✓	✓	✓	✓		✓							
Hydrocarbons (Methane, Ethane, Propane, Butane)	✓		✓	✓	✓	✓		✓					✓	✓	
Terephthalic Acid/Water Slurry							✓	✓			✓				✓
Wash Water	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓				
Gas Processing	Sundyne Pumps												Sundyne Compressors		
Hydrogen Processing	✓				✓	✓							✓	✓	✓
Hydrogen Refueling					✓	✓								✓	✓
Glycol Dehydration	✓		✓	✓	✓	✓									
Ammonia			✓	✓	✓	✓	✓	✓			✓		✓	✓	✓
Recycle Gas													✓	✓	
Fuel Gas Boost													✓	✓	
ESG Applications*	Sundyne Pumps												Sundyne Compressors		
CO ₂ Capture	✓						✓	✓	✓	✓	✓		✓	✓	
NO _x Suppression							✓				✓				
Amine Scrubbing			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Battery Production		✓	✓	✓	✓	✓									
Lithium Ion Battery Production		✓	✓	✓	✓	✓									
Bio-diesel/Ethanol	✓		✓	✓	✓	✓		✓	✓	✓	✓		✓	✓	

ANSIMAG Sealless Magnetic Drive ETFE Lined Pumps for Safe Chemical Processing

ANSIMAG sealless magnetic drive pumps are specifically designed for chemical processing applications. All wetted parts are molded fluoropolymer materials combined with SiC (Silicon Carbide) bearings that safely handle a wide range of corrosives and solvents (up to 250°F/121°C) without corrosion. A patented, fully Encapsulated Mag Drive hermetically seals the inner magnets to isolate them from process fluid and maintain magnet integrity for the life of the unit. A fiber reinforced vinyl ester shell delivers unprecedented reliability.

Performance Characteristics:

	Product	Flow	Head	Pressure	Temperature
	ANSIMAG K+	Up to 675 gpm (153 m³/hr)	Up to 320 ft (97 m)	285 psi (19.6 bar)	-20 to 250°F (-29 to 121°C)
	ANSIMAG KF	1,470 gpm (334 m³/hr)	520 ft (110 m)	350 psi (24 bar)	-20 to 250°F (-29 to 121°C)
	ANSIMAG KV Vertical	325 gpm (74 m³/hr)	325 ft (69 m)	285 psi (19.6 bar)	-20 to 250°F (-29 to 121°C)
	ANSIMAG KP Self-priming	285 gpm (65 m³/hr)	150 ft (32 m)	285 psi (19.6 bar)	-20 to 250°F (-29 to 121°C)
	ANSIMAG ALI ISO Design	285 gpm (65 m³/hr)	150 ft (32 m)	285 psi (19.6 bar)	-20 to 250°F (-29 to 121°C)
	ANSIMAG KM	147 gpm (33 m³/hr)	140 ft (30 m)	150 psi (10.3 bar)	-20 to 250°F (-29 to 121°C)

ANSIMAG pumps are more energy-efficient than mechanically sealed pumps. An innovative rear casing generates no eddy currents thus eliminating heat generation and reducing energy costs. Because ANSIMAG pumps do not have seals – there are no leaks, no emissions and no costs related to seal maintenance.






ANSIMAG Benefits Specific to CPI Applications:

- Zero Leakage** – Sealless design and a single, fully-contained O-ring eliminates possible leakage.
- Chemically Resistant Lining** – Carbon Fiber reinforced ETFE is resistant to most chemicals.
- Secondary Containment** – Lined Fiber/Epoxy containment shell offers unsurpassed pressure handling capability.
- Corrosion Protection** – Powder Coat exterior is more durable and chemically resistant than Epoxy based paints.
- Durable Construction** – Ductile iron exterior is designed for heavy-duty chemical applications.
- Magnetic Drive** – Hermetically seals the inner magnets, isolating them from the process fluid.
- Fully-Encapsulated Inner Drive** – Provides unsurpassed resistance to chemical attack.
- Easy Service** – Only 9 wetted parts and a back pull-out design enables service without breaking the wet end.
- Small Footprint** – Close coupled design offers quiet operation.

HMD Kontro Sealless Magnetic Drive Pumps meet all ISO and ASME Pump Standards

Since 1947, HMD Kontro has been recognized as the pioneer of sealless pump engineering and manufacturing. For the safe and efficient transfer of toxic, corrosive, carcinogenic and aggressive liquids, a wide range of HMD Kontro Sealless Magnetic Drive Pumps are designed of stainless steel with silicon carbide internal bearings, which enables them to withstand extremely high temperatures. Additional options of Alloy 20 or Alloy C with PTFE gaskets are also available. Pumps specifically designed for chemical processing applications include:

Performance Characteristics:

	Product	Flow	Head	Pressure	Temperature
	GTA/GTI Horizontal Metallic Sealless General Transfer	Up to 115 gpm (26 m³/hr)	Up to 125 ft (38 m)	275 psi (18.9 bar)	-40 to 500°F (-40 to 260°C)
	CSA/CSI Chemical Service	Up to 340 gpm (77 m³/hr)	Up to 296 ft (90 m)	275 psi (18.9 bar)	-40 to 500°F (-40 to 260°C)
	GSA/GSI Horizontal Metallic Sealless Engineered General Service	Up to 1420 gpm (320 m³/hr)	Up to 485 ft (150 m)	275 psi (18.9 bar)	-40 to 600°F (-40 to 315°C)
	HPGS High Pressure General Service	Up to 317 gpm (72 m³/hr)	Up to 305 ft (93 m)	2,680 psi (185 bar)	-40 to 500°F (-40 to 260°C)
	SPGS Horizontal Metallic Sealless Self-Priming	Up to 200 gpm (45 m³/hr)	Up to 170 ft (52 m)	145 psi (10 bar)	-40 to 248°F (-40 to 120°C)

Pumping toxic chemicals presents health & safety risks to personnel and the environment. HMD sealless pumps are designed to handle hazardous, toxic, corrosive and aggressive liquids with zero leaks or emissions. HMD pumps are easy to maintain, have fewer working parts, no potential leak paths and no seal support systems to maintain. Maintenance is simple, and lifecycle costs are lower than mechanical sealed pumps. HMD pumps meet all industrial regulations, including ISO, API, ASME, ANSI, DIN and ATEX.

HMD Kontro Pumps are Specifically Designed for CPI Applications:

- Total Product Containment** – no leaks or emissions improving operator safety and environmental protection.
- No seals or seal support systems to replace or maintain** – reduces total lifecycle costs.
- High efficiency hydraulics** – covers a wide range of duty requirements.
- Maximized component interchangeability** – minimizes parts inventory.
- Small footprint** – close-coupled options available across all CPI pump ranges.
- Easy to install, commission, operate and maintain** with no requirements for special tools.
- Secondary Control & Containment options available** for enhanced protection in highly hazardous applications.
- High corrosion resistance with standard 316SS construction with alternative metallurgies** available on request to meet specific application needs.
- Robust construction and fully encapsulated magnets** ensuring longevity in extreme pumping environments.
- Compliance to industry standards** including ASME B73.3, ISO 2858 and IECEx.
- Zero-loss Shell option available for selected pump ranges** to increase efficiency and reduce running costs.

HMD KONTRO Sealless Pumps

Chemical Processing:

- Chlor-Alkali
- Pesticides
- Insecticides
- Herbicides
- Fertilizer
- Solvents
- Isocyanates

Water/Wastewater Treatment:

- Sodium hypochlorite
- Sodium hydroxide
- Sulfuric acid
- Ferric Chloride

Battery Manufacturing:

- Sulfuric acid
- Potassium hydroxide
- NMP




Other Industries:

- Mining (Sodium Cyanide, Sulphuric Acid, Hydrochloric Acid)
- Pharmaceuticals (Vaccine Production, Heat Transfer)

Sundyne API 610 Direct Drive Pumps Save Space & Bring Unprecedented Reliability to Hydrocarbon & Chemical Processing Applications

Sundyne direct drive pumps are known for their reliability and space saving design. The direct drive family of vertical inline, single stage, overhung pumps features a close coupled design (OH5) or a separate bearing bracket (OH3) with a flexible shaft coupling to accommodate multiple motor options. Each direct drive pump is designed specifically to handle chemical & petrochemical applications at their best efficiency point, in a manner that maximizes reliability and enhances tolerance to normal system variations.

Performance Characteristics:

	Product	Flow	Head	Pressure	Temperature
	LMV 803Lr Ultra-Low NPSH Direct Drive Centrifugal Pump	Up to 800 gpm (182 m ³ /hr)	1,080 ft (268 m)	400 psi (28 bar)	-200 to 400°F (-129 to 204°C)
	801 CS Cartridge Seal Direct Drive Pump	Up to 380 gpm (86 m ³ /hr)	720 ft (220 m)	875 psi (60 bar)	-40 to 300°F (-40 to 149°C)
	LMV 801 Direct Drive Pump	Up to 380 gpm (86 m ³ /hr)	720 ft (220 m)	1000 psi (69 bar)	-200 to 650°F (-130 to 340°C)

Each pump in the series features a single-stage centrifugal design with single, double or tandem seal arrangements as well as select API 682 cartridge seal configurations for reliable service in the most difficult applications.






Common Sundyne OH3 and OH5 Pump Applications in Petrochemical Processing

- Acid feed
- Acid recirculation
- Olefin charge
- De-propanizer charge
- Polypropylene feed
- Reflux pumps
- Overhead
- Sour water
- Wash down
- Bottoms pumps

Sundyne Heavy Duty Single & Multi Stage Integrally Geared API Pumps

Sundyne API 610, OH6 Integrally Geared Pumps are engineered for critical high-head, low-flow, heavy-duty services required in the hydrocarbon processing and chemical & petrochemical industries. Sundyne's unique design optimizes efficiency, curve shape, NPSH, runout horsepower and radial loading to provide economical & reliable operation through various combinations of impeller, diffuser and inducer geometry. Available in vertical or base-mounted configurations, Sundyne's single-stage integrally-gear pumps offer multi-stage performance from a single-stage unit.

Performance Characteristics:

	Product	Flow	Head	Pressure	Temperature
Single-Stage Integrally Geared					
	LMV 3XX OH6 Integrally Geared Pump	Up to 1,040 gpm (236 m ³ /hr)	6,300 ft (1,921 m)	1000 psi (69 bar)	-200 to 650°F (-130 to 340°C)
	BMP 338 Integrally Geared Pump	Up to 1,100 gpm (250 m ³ /hr)	2800 ft (854 m)	500 psi (34 bar)	200 to 650°F (-130 to 340°C)
Multi-Stage Integrally Geared					
	HMP 7000 Multi-Stage Integrally Geared Pump	Up to 1800 gpm (410 m ³ /hr)	14,500 ft (4,420 m)	1000 psi (69 bar)	-200 to 500°F (-130 to 260°C)

Sundyne API 610 heavy duty multi-stage integrally-gear pumps are engineered for extremely high-head services, such as processing **fertilizer, PTA** and **urea**. Unlike conventional multi-stage pumps, Sundyne computer tailored hydraulics place the B.E.P. at the rated point – resulting in optimum efficiency, minimum recirculation and minimum vibration. An added benefit is reduced end-of-curve horsepower, allowing for reduced driver sizing and a smaller footprint.



Single-Stage Pump Applications

- Acid feed
- Acid recirculation
- Olefin charge
- De-propanizer charge
- Polypropylene feed
- Reflux pumps
- Overhead
- Sour water
- Wash down
- Bottoms pumps

Multi-Stage Pump Applications

- Fertilizer
- PTA-Purified Terephthalic Acid
- Urea

Sealless Magnetic Drive API 685 Pumps

As the innovators of magnetic drive pumps and with nearly 40 years of experience in the supply of pump units built to API standards, Sundyne HMD Kontro offers a broad range of horizontal and vertical sealless pumps that provide full compliance with the API 685 standard.








HMD KONTRO
Sealless Pumps

Applications – The Right Choice for Light Hydro-Carbons

- Feed pumps
- Booster pumps
- Bottoms pumps
- Wash water pumps
- Reflux pumps
- Condensate pumps

Performance Characteristics:

	Product	Flow	Head	Pressure	Temperature
	HMD Kontro GSP Horizontal OH2 Metallic Sealless API 685	Up to 3,084 gpm (700 m ³ /hr)	Up to 790 ft (240 m)	580 psi (40 bar)*	-148 to 660°F (-100 to 350°C)
	HMD Kontro GSPV Vertical OH4-style Metallic Sealless API 685	Up to 1,035 gpm (235 m ³ /hr)	Up to 295 ft (90 m)	580 psi (40 bar)	-40 to 400°F (-40 to 205°C)
	LMV-801S Vertical OH4-style Low-Flow Metallic Sealless API 685	Up to 380 gpm (86 m ³ /hr)	720 ft (220 m)	580 psi (40 bar)*	-148 to 400°F (-100 to 205°C)
	HMD Kontro GSPLF Horizontal OH2 Low-Flow Metallic Sealless API 685	Up to 160 gpm (36 m ³ /hr)	Up to 720 ft (220 m)	580 psi (40 bar)	-148 to 660°F (-100 to 315°C)
	HMD Kontro GSPX Horizontal BB5 Multi-Stage Metallic Sealless API 685	Up to 450 gpm (103 m ³ /hr)	Up to 1400 ft (426 m)	580 psi (40 bar)	-40 to 500°F (-40 to 260°C)

* Higher pressures available on request

These pumps are specifically engineered to eliminate emissions and improve personnel safety without compromising high performance and industry leading reliability.

Safer for Employees & Better for the Environment:

With magnetic drive sealless pumps, there are no leaks or emissions to the atmosphere. This reduces the need for EPA monitoring and reduces health & safety risks to plant personnel. Reducing the probability of accidents and emissions also reduces a plant's liability, which can help to reduce insurance costs. Sealless pumps offer a cleaner working environment and greater peace-of-mind when it comes to EH&S (Environmental Health & Safety).


The Best Choice for the Bottom Line:

Sealless magnetic drive pumps save time & money – before, during and after installation. With sealless pumps, commissioning is quicker. Once up & running, maintenance activities are reduced because seal changes are eliminated. This enables skilled labor to be allocated to other priorities, which helps to further reduce plant downtime. Spare parts inventories can also be downsized, because seals & parts for seal support systems do not need to be stocked.

Marelli Heavy Duty API 610 and ISO Process Pumps

Process engineers utilize Marelli heavy duty API pumps for petrochemical applications requiring high-pressure and/or high flow. The pumps are efficiently designed to save energy and meet exacting API 610 and ISO 13709 standards for overhung, between-bearings and vertically-suspended centrifugal pumps. Marelli multi-stage pumps are capable of reaching flow rates as high as 66,000 gpm (15,000 m³/hr) with high pressures.

Performance Characteristics:

	Product	Flow	Head	Pressure	Temperature
	API 610 OH2 Horizontal Single or Double Volute Centrifugal Pump Centerline Mounted	Up to 7,000 gpm (1,280 m ³ /hr)	1,200 ft (265 m)	551 psi (38 bar)	-238 to 842°F (-150 to 450°C)
	API 610 BB1 Centrifugal Pump Axially Split Case 1 or 2 stages	Up to 27,298 gpm (4,905 m ³ /hr)	600 ft (200 m)	130 psi (9 bar)	-22 to 302°F (-30 to 150°C)
	API 610 BB2 Centrifugal Pump Radially Split Case 1 or 2 stages	Up to 13,208 gpm (2,300 m ³ /hr)	1,640 ft (350 m)	290 psi (20 bar)	-22 to 752°F (-30 to 400°C)
	API 610 BB3 Multi-stage Centrifugal Pumps	Up to 2,460 gpm (600 m ³ /hr)	4,260 ft (1,300 m)	232 psi (16 bar)	-40 to 410°F (-40 to 210°C)
	ND Model ISO 5199/2858	Up to 5,468 gpm (1000 m ³ /hr)	680 ft (150 m)	290 psi (20 bar)	-58 to 480°F (-50 to 250°C)
	API 610 VS1, VS2, VS4, VS6 Vertically Suspended, Single/Double Volute Single or Multistage Centrifugal Pumps	Up to 13,280 gpm (2,400 m ³ /hr)	1,640 ft (350 m)	290 psi (20 bar)	-22 to 752°F (-30 to 400°C)

Originally manufactured under the Marelli Bombas brand in Spain, these pumps feature rugged and low vibration balanced rotor designs. The global installed base of Marelli pumps is more than 10,000 units, and many have been running for decades.

Marelli Pumps are Well-Suited to Petrochemical Applications:

- Designed for higher efficiency, with a wide variety of hydraulics to match exact duty points.
- Highly maintainable and replaceable wear rings to reduce overall life cycle costs.
- Multiple impeller options in each hydraulic pump casing for maximum efficiency.
- Labyrinth bearing seals to avoid external contamination and to maximize seal life.
- Wide variety of instrumentation options for monitoring key operational parameters.



Petrochemical Applications

- Hydrocracking
- Topping
- Gas Condensate
- HDS
- Merox LPG
- Amine
- Sour Water Stripper
- Coker
- Tank Farms
- Fertilizers
- Oil fields and terminals
- Synfuels





Chemical & Industrial Applications

- Raw Water Intake
- Desalination
- Reverse osmosis
- Condensate Extraction
- Boiler Feed Water
- Cooling Towers
- Irrigation
- Water Transfer

Fit-for-Purpose, Industrial Grade Pumps Offer the “Right Pump at the Right Price” for Select CPI Applications

API specifications define safety & reliability standards for process pumps – mostly those used in refineries and petrochemical plants. Pumps adhering to these specifications are more expensive than other pumps, because they’re designed for supreme quality and redundancy in many cases. Not every application in a chemical plant requires this level of redundancy, packaging & documentation – and full adherence to API standards can result in a pump that is “over spec’d” for the application. How do operators address the needs for highly reliable, high pressure pumps, without having to pay for all the “bells & whistles” that come with an API pump? The answer is Industrial Grade Pumps.

Performance Characteristics:

	Product	Flow	Head	Pressure	Temperature
	Sunflo P 3400 Industrial Grade Pump	Up to 550 gpm (125 m ³ /hr)	Up to 5,280 ft (1,609 m)	350 psi (24 bar)	-50 to 350°F (-46 to 177°C)
	Sunflo P 3000 Industrial Grade Pump	Up to 500 gpm (114 m ³ /hr)	Up to 4,200 ft (1,280 m)	350 psi (24 bar)	-50 to 350°F (-46 to 177°C)
	ANSIMAG KM	147 gpm (33 m ³ /hr)	140 ft (30 m)	225 psi (15.5 bar)	-20 to 250°F (-29 to 121°C)
	SundWASH High Pressure Wash-down System	Up to 50 wands @7 gpm each (50 X 1.6 m ³ /hr)		900 psi (62 bar)	

All of the pumps in Sundyne’s Industrial, Fit-for-Purpose family leverage Sundyne’s field-proven high pressure impeller technology that is optimized to deliver high head. Each pump leverages the legacy of Sundyne’s heavy duty API integrally geared pumps to create industrial grade pumps that save energy through efficient high-pressure pumping. The impellers on all of the Sunflo pumps feature unique suction inducer technology, which is optimized to deliver low NPSH and eliminate pump cavitation. These pumps all feature compact footprints, and are readily available for less than the cost of API 610 pumps.

SUNFLO®

SUNFLO®
ANSIMAG





Applications

- Boiler Feed pumps
- Condensate pumps
- Wash water pumps
- Cleaning Systems
- Dust Suppression
- NOx Suppression
- Water Treatment
- pH Control & Disinfection
- EV Battery Production
- Freeze Drier Coolant
- Vaccine Production

API 617, 618 Centrifugal & Diaphragm Compressors for CPI Applications

Compressors are the heart of hydrocarbon processing or CPI applications – because their reliability directly impacts productivity & efficiency. NACE- compliant Sundyne compressors handle the most difficult gas processing conditions. Sundyne compressors can be built specifically to meet API standards, and each is designed to provide pulsation & vibration free operation while delivering oil-free gas compression with zero emissions.

Performance Characteristics:

	Product	Flow	Pressure	Max Speed	Temperature
Single-Stage Centrifugal Compressors					
	Sundyne LMC Line Mounted Vertical Integrally Geared Compressors	2,500 acfm (4,150 m ³ /h)	2,300 psi (160 bar)	34,200 rpm	-200 to 500°F (-130 to 260°C)
	Sundyne BMC Base Mounted Integrally Geared Compressors	2,500 acfm (4,150 m ³ /h)	2,300 psi (160 bar)	34,200 rpm	-200 to 500°F (-130 to 260°C)
Multi-Stage Centrifugal Compressors					
	LF 2000 API 617 ISO 10439 Integrally Geared Multi-Stage (1-6) Compressors	13,000 acfm (22,000 m ³ /hr)	5,000 psi (350 bar)	42,000 rpm (60 Hz), 42,000 rpm (50 Hz)	-200 to 500°F (-130 to 260°C)
Diaphragm Compressors					
	PPI 9X Series Single- or Multi-Stage Diaphragm Compressors	145 acfm (250 m ³ /hr)	16,750 psi (1,155 bar)	Up to 450 rpm	Up to 450°F (232°C)

Sundyne horizontally configured compressors are ideal for skid packaging, due to their small footprint & unique modular baseplate. Sundyne multi-stage compressors can provide 1-6 stages of centrifugal compressors on a single gearbox – saving valuable space while also reducing energy costs. Sundyne gas compressors provide the performance envelope, the feature set, the reliability ratings and the uncompromising efficiency needed to address the Best Efficiency Point (BEP) for any process gas application. Designed for mission-critical applications and backed by 700 millions hours of field operation, our solution ensures up to 7 years of operation with a 99.7% availability, without the need for complex and costly maintenance.

Sundyne
Compressors

PPI

Single- & Multi-Stage Compressor Applications

- CO₂ and Syngas Compression
- Hydrogen and Syngas Recycle
- Ammonia
- Chlorine gas compression
- Regeneration Gas Compressor
- Tail Gas Compression
- Cracked Gas
- Refrigeration

PPI Diaphragm Compressor Applications

- Hydrogen Processing
- Hydrogen Fuel Cells
- Specialty chemical production



Sundyne is the One-Stop-Shop for Sealless Pumps for any CPI Application

Why Sealless Pumps are Preferred for CPI Applications

While pumps utilizing mechanical seals play a key role in many applications, it's no secret that almost 85% of pump failures start with seal leaks that cause problems elsewhere in the pump. When planning a new installation, CAPEX for the seal support system is considerable. After installation, OPEX for seal monitoring & maintenance activities is unavoidable.

Who Should Consider Sealless Pumps?

- Applications with legislative & liability risk compliance
- Units needing to improve reliability
- Duties that are hard to seal
- Applications/fluids that react with moisture/air
- Any plant seeking to meet higher MTBF goals

Sealless pumps eliminate the seal and associated support systems, providing an economical, reliable and leak-free solution for handling toxic or hazardous liquids. The Top 10 Advantages that Magnetic Drive Sealless Pumps offer:

1. No seals & no seal support systems
2. Complete fluid containment
3. Zero emissions
4. Reduced installation costs
5. Reduced maintenance costs
6. Longer MTBF intervals
7. Maintenance time/skills can be used elsewhere
8. No EPA monitoring/documentation
9. Improved operator safety
10. Protection for the environment

What are the Benefits of Sealless Pumps?

- Significantly cheaper installation costs
- Compact footprint with no alignment issues
- No seal support system and utilities
- Less instrumentation
- Higher MTBF
- Less Maintenance & lower Total Cost of Ownership
- No product leakage
- Zero environmental impact

Adherence to Industry Standards:

Standards play a key role in the chemical industry. The characteristics they define assure customers that performance & safety requirements are met, while also guaranteeing interoperability for equipment throughout a plant.



ANSI – American National Standards Institute
ASME – American Society of Mechanical Engineers
ISO – International Organization for Standardization
API – American Petroleum Institute

The **ANSI/ASME B73.3** standard addresses centrifugal pumps for the chemical industry. The standard covers 27 pump sizes and specifies dimensions for height, length, nozzle and shaft diameters, plus the location & spacing of mounting bolts. The **ISO 5199/2858** standards cover the same type of industrial pumps as ANSI B73.3. **API 685** describes the requirements for sealless centrifugal pumps manufactured for the petrochemical industry.

Sundyne sealless pumps meet & exceed chemical industry standards – anywhere around the globe.

Metallic Options

HMD's engineers have leveraged more than 70 years of experience to ensure that HMD Kontro sealless pumps adhere to, and exceed the latest ASME and ISO standards.



Non-Metallic Options

For highly corrosive chemical applications, ANSIMAG pumps are available in high-grade fluoropolymer materials that stand up to abrasive or highly-corrosive applications.



API-Compliant Options

Sundyne provides a comprehensive range of fully compliant API 685 pumps that are specifically engineered to eliminate product emissions and improve personnel safety without compromising on high performance and reliability



Sundyne is the one-stop-shop for sealless pumps for any CPI application.

The Value of Engineered Solutions

Sundyne's engineers have learned a lot over the last 80 years – providing pumps & compressors to thousands of customers in the Chemical Processing Industry. Today, this expertise is applied to pump & compressor designs that are specifically tailored to each customer's application, delivering unmatched performance & reliability.

Comprehensive Portfolio to Address any CPI Application:

- Pumps & compressors
- Industry's widest range of sealless pumps (including HMD & ANSIMAG)
- Sealed pumps in single, double, tandem or cartridge seal configurations
- Metal or ETFE materials of construction
- Sized to deliver any flow or head requirements
- Compact footprints




Consultative Selling Approach:

- Sundyne listens carefully to customers
- Identify pain points
- Customized solutions – tailored to each application's flow, head, temperature and corrosion resistance requirements

Uncompromising Reliability:

- Sized specifically to run at BEP
- Corrosion resistant materials of construction
- Secondary containment options
- Less maintenance & significantly longer MTBM intervals
- Most maintenance can be done by one person, with one wrench in less than one hour

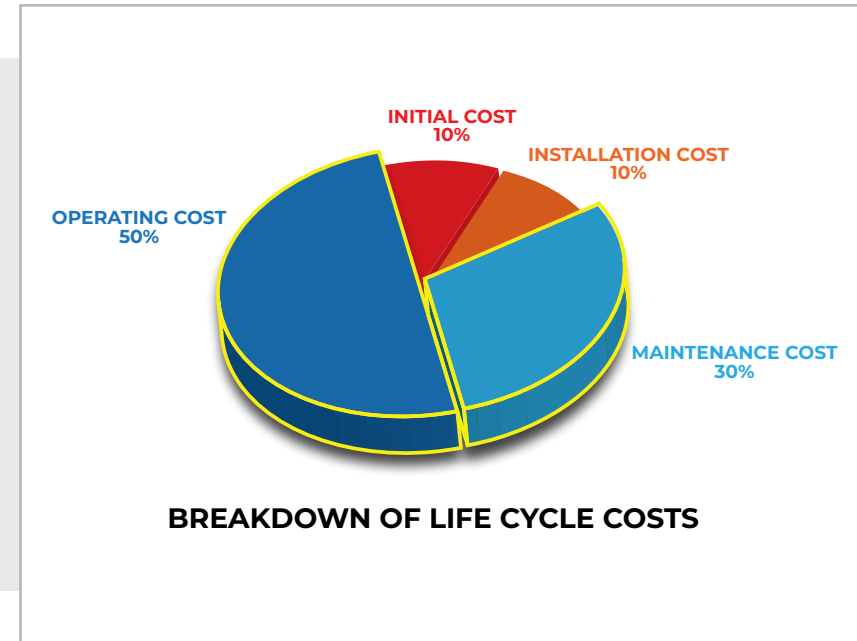

Efficiency Minimizes Total Cost of Ownership:

- Efficient designs enable smaller motors to be specified
- > 50% of lifecycle costs are operating costs
- > 30% of lifecycle costs are maintenance costs

Precision Manufacturing:

- Made in the USA, UK, France and Spain
- Short delivery times
- Comprehensive testing – ensures no surprises and limited adjustments once deployed



“When we're pumping aggressive and corrosive materials that no one else wants to touch, we call Sundyne.”


Performance Tailored to Your Process

When it comes to handling harsh & corrosive chemicals, Sundyne's engineered solutions set the standards for reliability, efficiency and safety – resulting in lower total lifecycle costs and uncompromising performance.

24x7, Global Aftermarket Services to Keep Equipment Repaired, Re-Rated & Re-Configured

Sundyne's uncompromising reliability is not just a function of superior design. It's also delivered by high-touch services at commissioning, through planned turnarounds, and at every step of the way to ensure reliable day-to-day operation for years. With manufacturing operations and Authorized Service Centers (ASC) around the globe, Sundyne provides prompt & local support to keep customers up-and-running.

Conversions

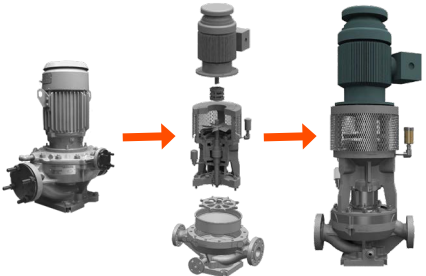

- **801 to 801 CS/S (Cartridge Seal/Sealless):** Convert to sealless or upgrade to API 682 cartridge seal.
- **HMP3/5 Upgrade:** Increased reliability using the latest engineered components
- **Gearbox Upgrades**
- **OH2 Drop In Replacements:** API 610 and 682 options. No shutdown / No Piping Changes!
- **OH2 ReFIT Kit:** Upgrade outdated OH2 to 12th Edition API by reusing existing impeller/casings
- **ReRate Conversions**

OEM Parts

- Insure High Quality Standards
- Warranty Protection
- Sundyne Tolerances
- Critical Spares: For quick repairs

Site Surveys

- Free Site Audits by Sundyne engineers at no charge!
- Verify that equipment is running at B.E.P.
- Perform Equipment Health Checks
- Upgrade Options
- Optimize Stock Holding




Upgrade Kits

- **Reliability Assurance Kits:** For simple overhaul/repairs.
- **Reliability Upgrade Kits:** Upgrade your Gearbox to the latest design.
- **Wet End Kits**
- **Critical Spares Kits:** Class I, II, & III

SundSCHOOL

- Maintenance & Operations Arvada, CO USA Factory
- Maintenance & Operations Dijon, France Factory
- On-Site Maintenance & Operations School

Gearbox Exchange



- Up to 30% Exchange Credit!
- Convenient Streamlined Maintenance Planning
- Lower Lead Time = Greater Uptime
- New gearboxes include all the latest design improvements
- Re-Rate for Better Reliability: During the exchange, Sundyne Engineers can re-rate and establish a new B.E.P.

Field Service

- Troubleshooting
- Service Agreements
- Start Up Assistance with new and repaired units
- 24x7 Global Support
- In field repairs when possible
- Maximize Up Time

Repairs


- Global 24x7 Coverage, Local Support
- Factory Overhaul & Repair: Arvada, Dijon, Spain and Eastbourne
- Sundyne Expert Repair Specialists
- Authorized Service Centers
- Optional Factory Performance Testing with Extended Run Test, NPSH Test.



RELIABILITY REALIZED.™


Sundyne's CPI Value Proposition

For more than 70 years, Sundyne has worked extensively with the world's largest chemical & petrochemical companies. During this time, Sundyne has pioneered many of the technologies that are commonplace today. Sundyne's commitment to the CPI is stronger than ever, through a unique combination of technology, support and expertise that provides a **total product lifecycle, 360° service**, from the pre-feed process – to comprehensive 24X7 aftermarket support.

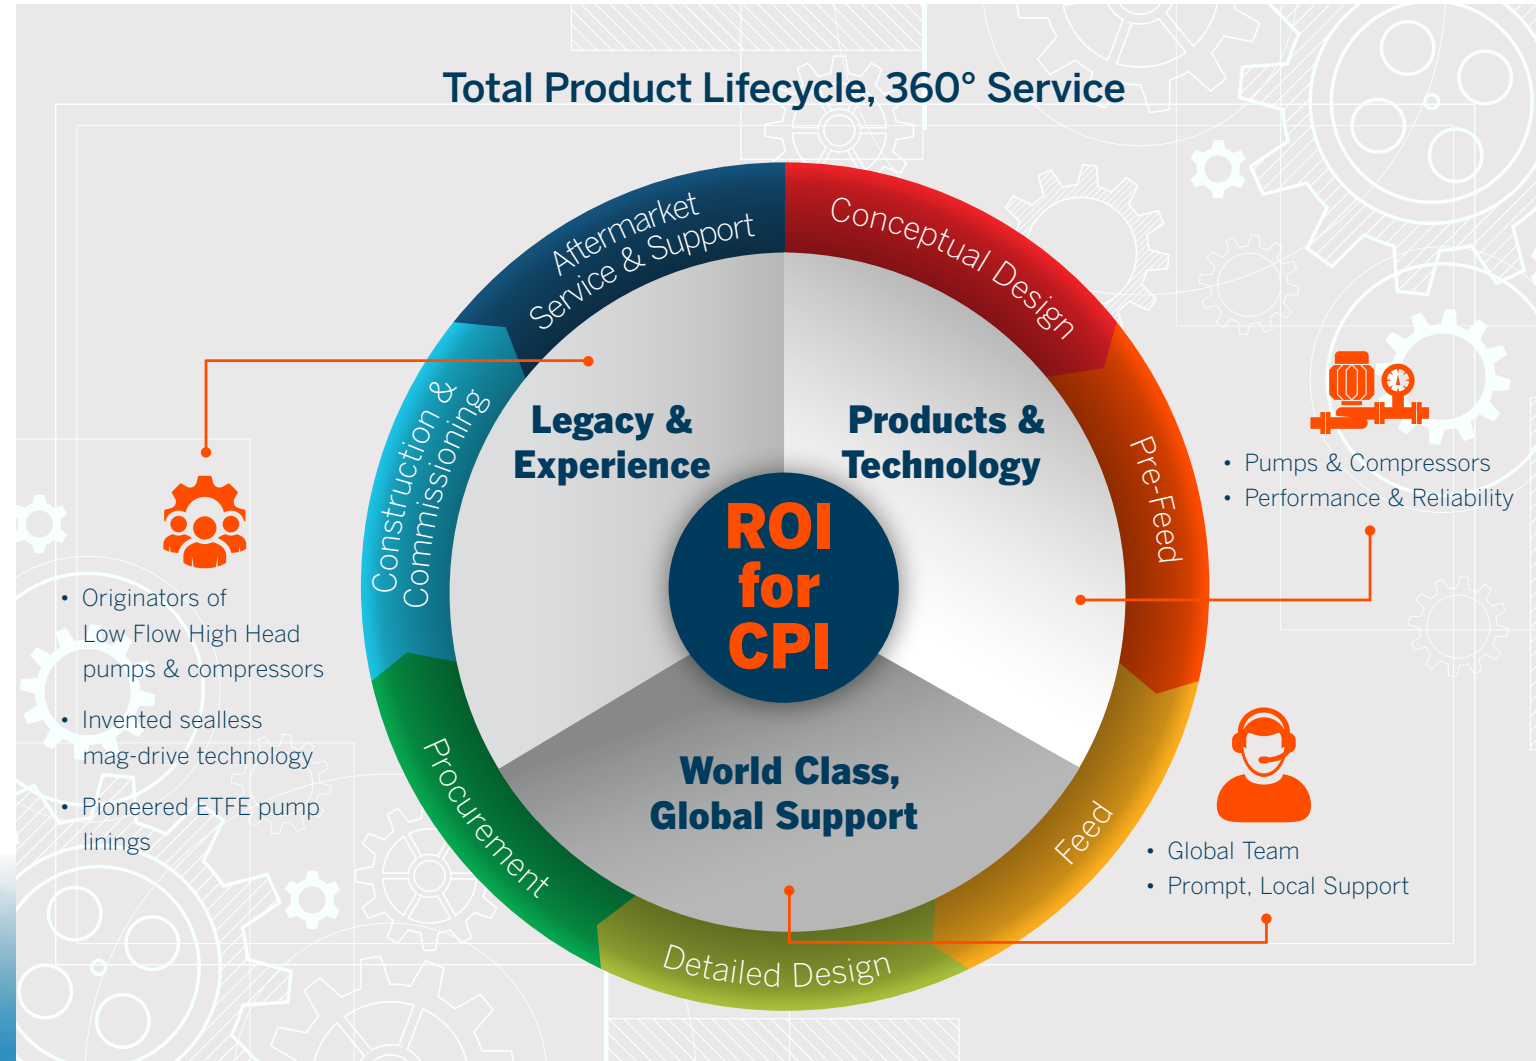

Honeywell & Sundyne are Shaping the Future of the Chemical & Industrial Markets

The combined Honeywell and Sundyne portfolio offers innovative and comprehensive solutions that are tailored for chemical & industrial markets. The combination of proven process technologies, automation, equipment and digital tools under the same umbrella provides end-to-end solutions that drive innovation and efficiency, while supporting chemical & industrial needs across the world.

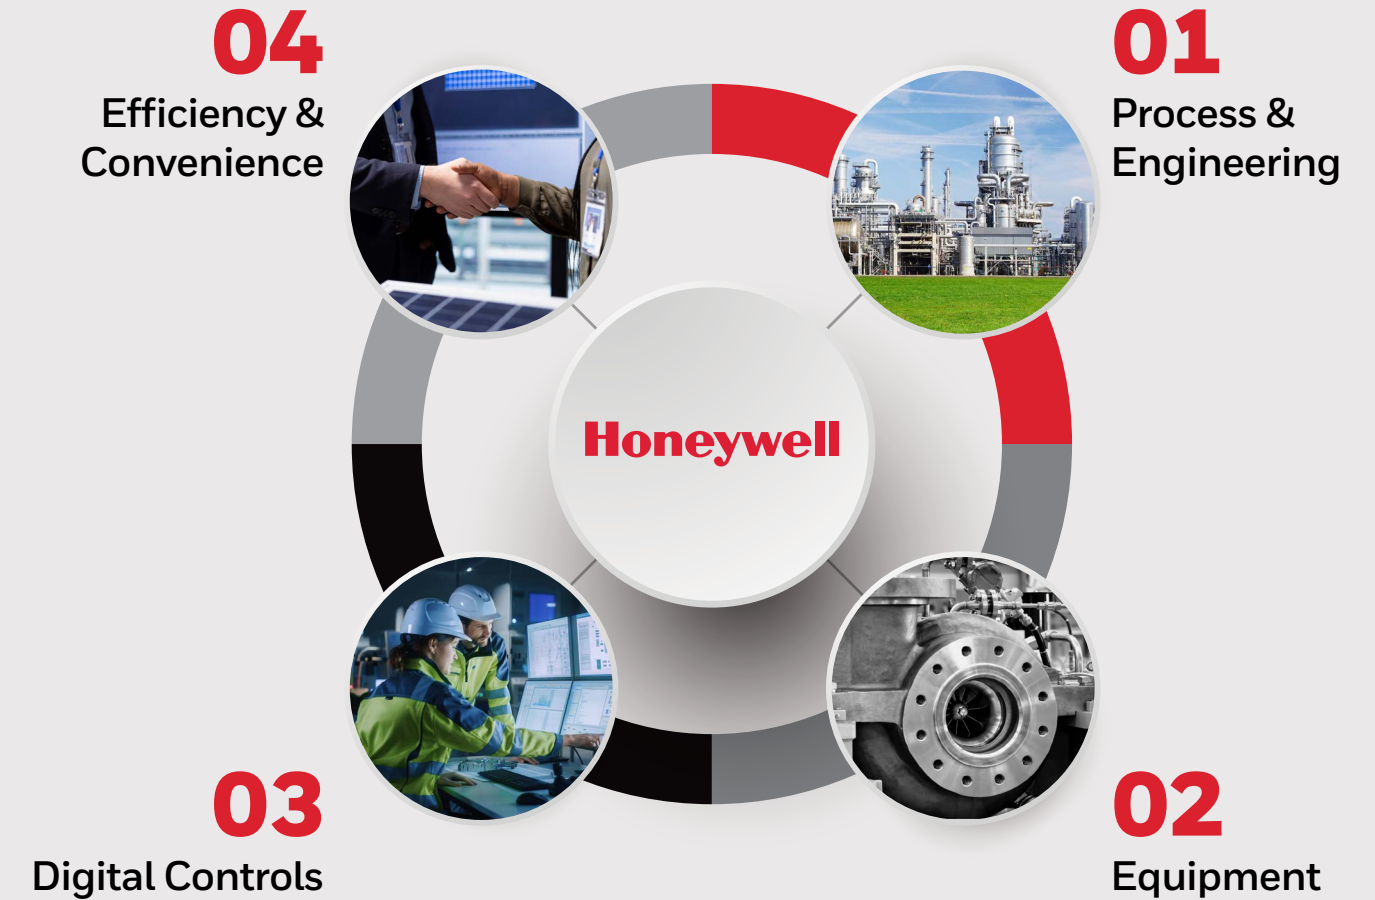

Honeywell's global footprint and customer relationships significantly expand the available market for Sundyne's offerings. Obtaining process engineering, equipment, digital controls and aftermarket services from a single source offers greater accountability, faster project development and greater lifecycle support to enhance CAPEX and OPEX.





When it comes to CPI applications,
Sundyne is the **Safer, Better,
Best** choice.

Safer for Operations
Better for the Environment
Best Total Lifecycle Value

For more information please visit
www.sundyne.com and
fill out the Contact Me form.
A Sundyne representative
will contact you.



Sundyne, LLC
14845 West 64th Avenue
Arvada, Colorado 80007 USA

marketing@sundyne.com
Phone: 1 303 425 0800
Fax: 1 303 425 0896
www.sundyne.com

Dijon, France
Eastbourne East Sussex, UK
Madrid/Toledo, Spain
Tokyo, Japan
Pune, India